


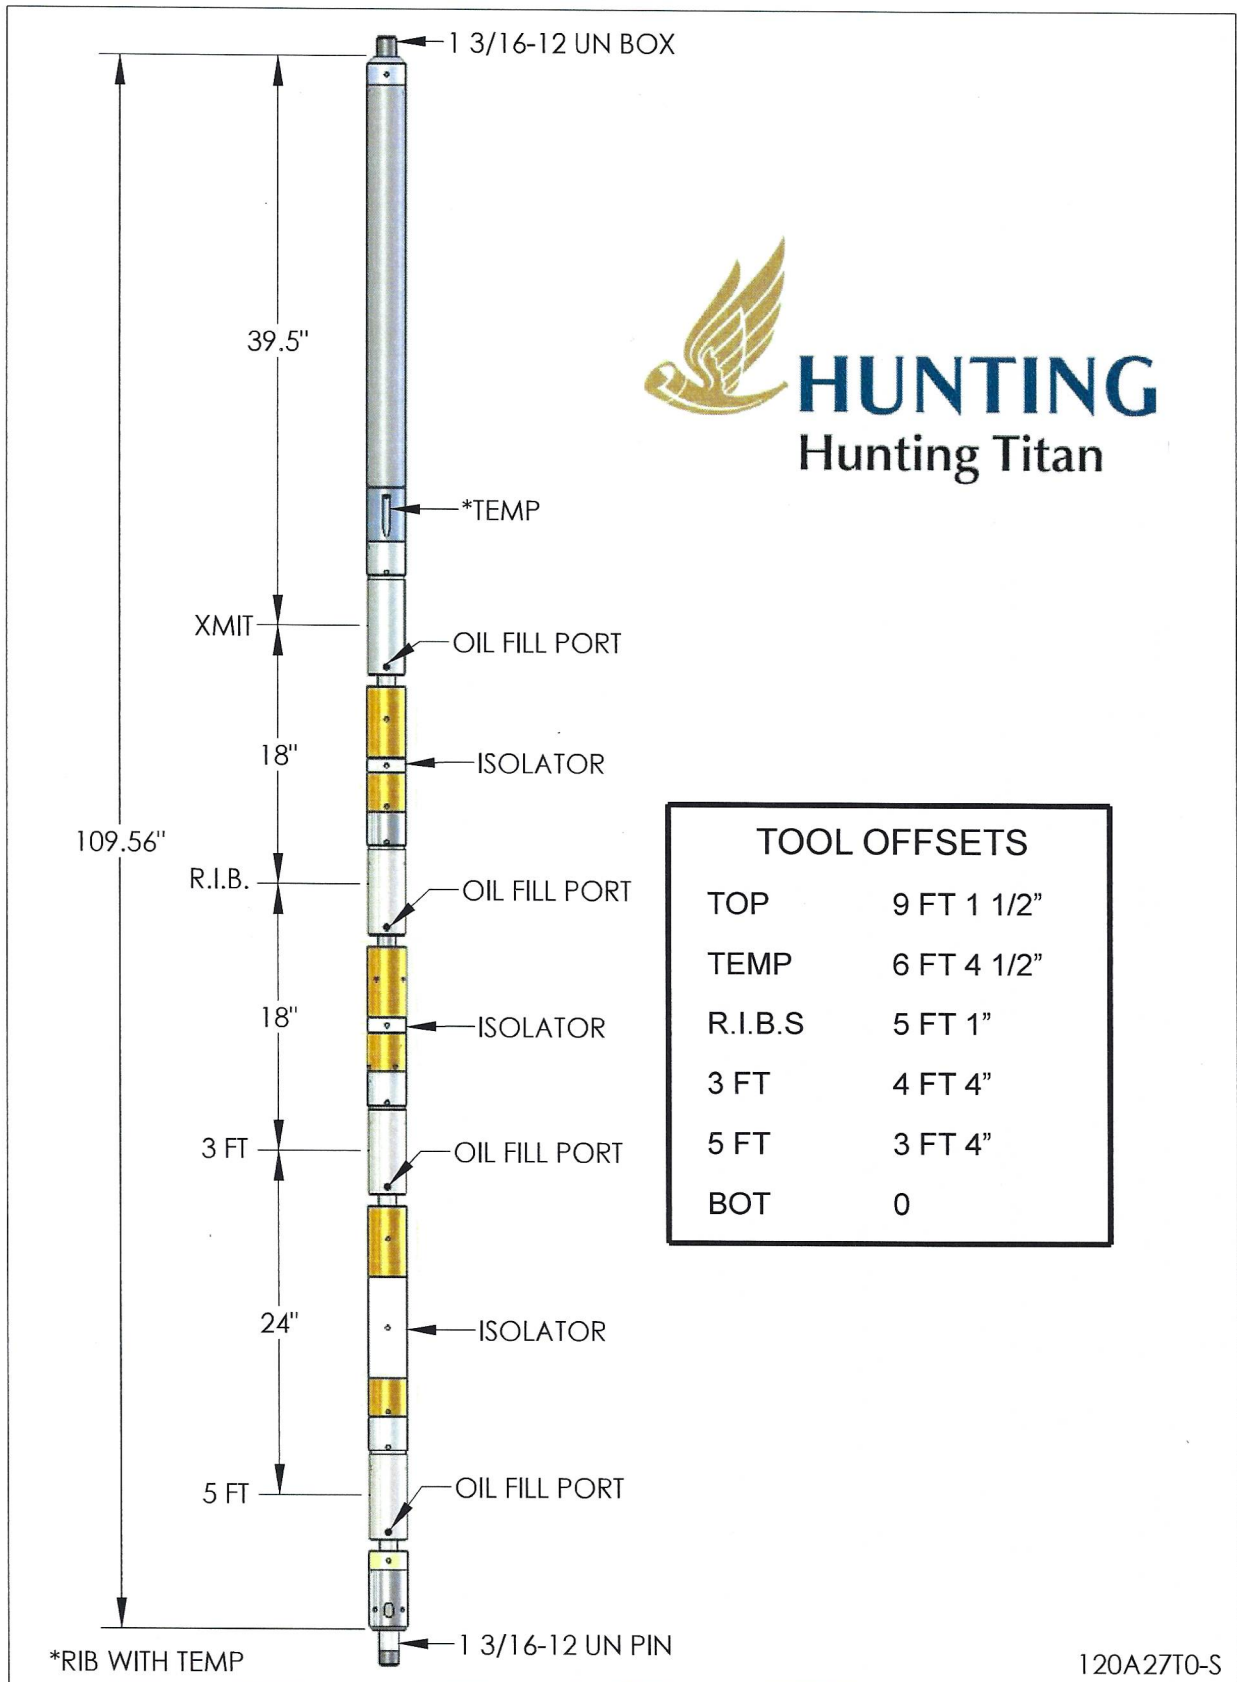

TOOL SPECIFICATIONS

Part Number8012-27572PE237-2.2-00-S
Description R.I.B. TOOL (*RADIUS INCREMENTED BOND W/SOLID ISO*) 2 3/4" O.D.

Part Number8012-2757HPE237-2.2-00-S
DescriptionR.I.B. TOOL (*RADIUS INCREMENTED BOND W/SOLID ISO*) 2 3/4" O.D. (with Temp)

Dimensions and Ratings:

Temperature Rating & Part Number

8012-27572PE237-2.2-00-S }400° F (204.44° C)
8012-2757HPE237-2.2-00-S (w/Temp) }

Maximum Pressure Rating20,000 PSI (138 MPa)
Tool Diameter 2 3/4" (6.99 cm)
Tool Length 109.5" (278.13 cm)
Weight130 lbs. (58.96 kg)
Recommended Logging Speed 48.8 Ft (14.87 M)/ Min
Operating Voltage 120 VDC
Operating Current 50 mA
Output Configuration Analog
Cable Type Single Conductor

Measure Point:

Temp 76.5" (194.31 cm)
Xmit 70" (177.8 cm)
R.I.B 61" (154.94 cm)
3 Ft 52" (132.08 cm)
5 Ft 40" (101.6 cm)

- ◆ SONIC FREQ FOR TRANSMITTER 3FT - 5FT ONLY (18kHz)
- ◆ SONIC FREQ FOR SECTORS.....(20kHz)
- ◆ INTERNAL CAL SIGNAL
- ◆ RUN GAMMA / NEUTRON ECT. 120 VDC TOOL ON BOTTOM
- ◆ THE R.I.B. TOOL GATES THE PULSE INFORMATION ON LINE WITH THE SONIC SIGNALS.
- ◆ BY-LEVEL PULSES AVAILABLE
- ◆ OUTSIDE TEMP AVAILABLE
- ◆ WILL RUN ON 7 /32 500° F HI CAPACITANCE LINES
- ◆ A LARGE 3 1/4" XMIT ASSY IS ALSO AVAILABLE FOR LARGE CASING. XMIT FREQ 16 kHz RECOMMENDED FOR 9 5/8" AND LARGER PIPE SIZES.